

SiRo T Efficient



NT10/72GDF

580-605W

N-type Bifacial Double Glass Module

TOPCon 1.0 Tech

Low degradation ensures reliable output over the module's lifetime

High bifaciality for superior rear-side power output

Excellent temperature coefficient ensures power generation in high temperature areas

Enhanced low-light response ensures stable output under low-light conditions

Sound quality management and product certification system

IEC61215:2021 / IEC61730:2023

ISO9001:2015: quality management system

ISO14001:2015: environmental management system

ISO45001:2018: Occupational Health and Safety Management System




Mechanical Data

Cell Type	N-Type Monocrystalline Solar Cell
Number of Cells	144 Cells (6x24)
Dimensions of Module	2278x1134x30mm (89.68x44.65x1.18 inches)
Weight	31.1kg
Front/Back Side Glass	2.0mm (0.08 inches), Anti-Reflection Coating 2.0mm (0.08 inches), Heat Strengthened Glass
Frame	Anodized aluminium alloy
J-Box	IP68 Rated, 3 diodes
Cable	4.0mm ² , +300/-200mm (length can be customized)
Connector	GCL-01/GCL-02/MC4-EVO2/others
Packaging Configuration	Module per box: 36 pieces Module per 40' HQ: 720 pieces

Module Dimension

Tolerance: Length:±2mm Width:±2mm

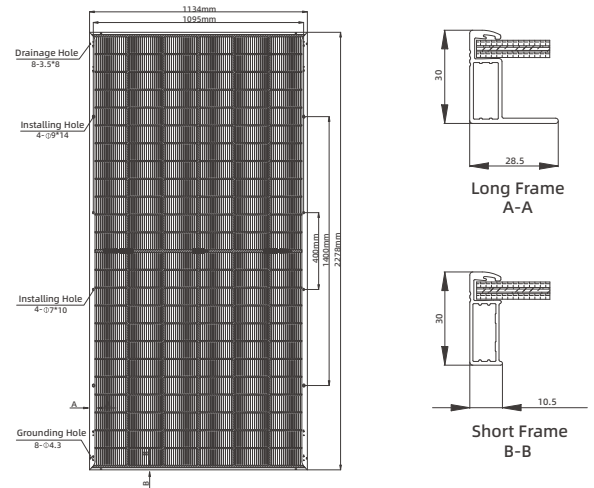

Electrical Specification (STC*)

 * Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5

	Pmax (W)	580	585	590	595	600	605
Maximum Power	Pmax (W)	580	585	590	595	600	605
Maximum Power Voltage	Vmp(V)	43.75	43.95	44.15	44.35	44.55	44.82
Maximum Power Current	Imp (A)	13.26	13.31	13.37	13.42	13.47	13.50
Open Circuit Voltage	Voc (V)	51.90	52.05	52.20	52.35	52.50	52.75
Short Circuit Current	Isc (A)	14.01	14.07	14.13	14.19	14.25	14.28
Module Efficiency	(%)	22.45	22.65	22.84	23.03	23.23	23.42
Power Output Guarantee	(%)	0~+3					
Temperature Coefficient of Isc	(Isc)	+0.045%/°C					
Temperature Coefficient of Voc	(Voc)	-0.25%/°C					
Temperature Coefficient of Pmax	(Pmax)	-0.29%/°C					

Electrical Characteristics with Different Power Bin (Reference to 10% Irradiance Ratio)


	Pmax (W)	626.5	631.6	637.5	642.6	648.2	653.5
Maximum Power	Pmax (W)	626.5	631.6	637.5	642.6	648.2	653.5
Maximum Power Voltage	Vmp(V)	43.75	43.95	44.15	44.35	44.55	44.82
Maximum Power Current	Imp (A)	14.32	14.37	14.44	14.49	14.55	14.58
Open Circuit Voltage	Voc (V)	51.90	52.05	52.20	52.35	52.50	52.75
Short Circuit Current	Isc (A)	15.13	15.20	15.26	15.33	15.39	15.42

Application Conditions

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Max Series Fuse Rating	30A
Wind/ Snow Load	2400Pa/5400Pa*
Bifaciality	80±5%

*For more details please check the installation manual of GCLSI

Linear Performance Warranty

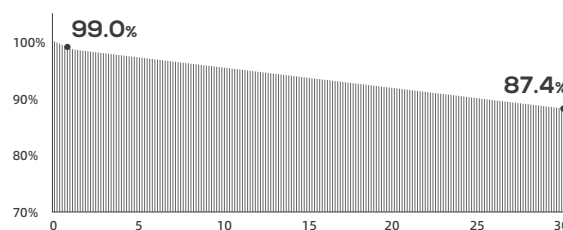

12 year
Product warranty

30 year
Linear power warranty

1%
First year power attenuation

0.40%
Annual degradation over 30 years